BATHTUB
BAIGNOIRE

INSTALLATION MANUAL
MANUEL D'INSTALLATION



Model/Modèle: RF1220B

Before You Begin

Use only components (drainer, overflow pipes, valves and fittings) that do not require any welding during the assembly.
Carefully read the installation manual before beginning the installation.
Consult local building codes to make sure the installation complies with standards.
To protect the unit during installation, we recommend that you lay a piece of cardboard on the bottom.
In addition, please check the product carefully for any visible damages, prior to installation. Contact Customer service if any damage is found.
This bathtub is made of acrylic and fibreglass.
We recommend that the installation be done by 2 persons.

Maintenance

Preheat the bathtub with warm water (18-20°C) before using, if the room temperature is too low. Please do not let hot water (more than 50°C) hit bathtub directly. Drain the water completely after using, then wipe the bathtub up with soft cloth. Make sure there is no water left in the bathtub, because any water left may freeze.

Regular disinfection provides an effective defense against various types of bacteria susceptible of developing in the deposits that build up over time in all bathtubs and showers.

For daily maintenance cleaning, use a moist cloth and gentle liquid detergent.

For acrylic surfaces, occasional use of a special acrylic surface cleaner will add luster and protect the finish.


Do not use abrasive cleaners, scrapers,metal brushes, or any items or products that could scratch or dull the surface.

Paint stains: Use either turpentine or a paint thinner.

Joint compound: Use a plastic or wood spatula covered with a damp cloth. Do not use a metal blade or a metal brush.


If a rubber mat is used, it must be removed immediately after each use.Ignoring this recommendation will cause damage not covered by the warranty.


Parts list

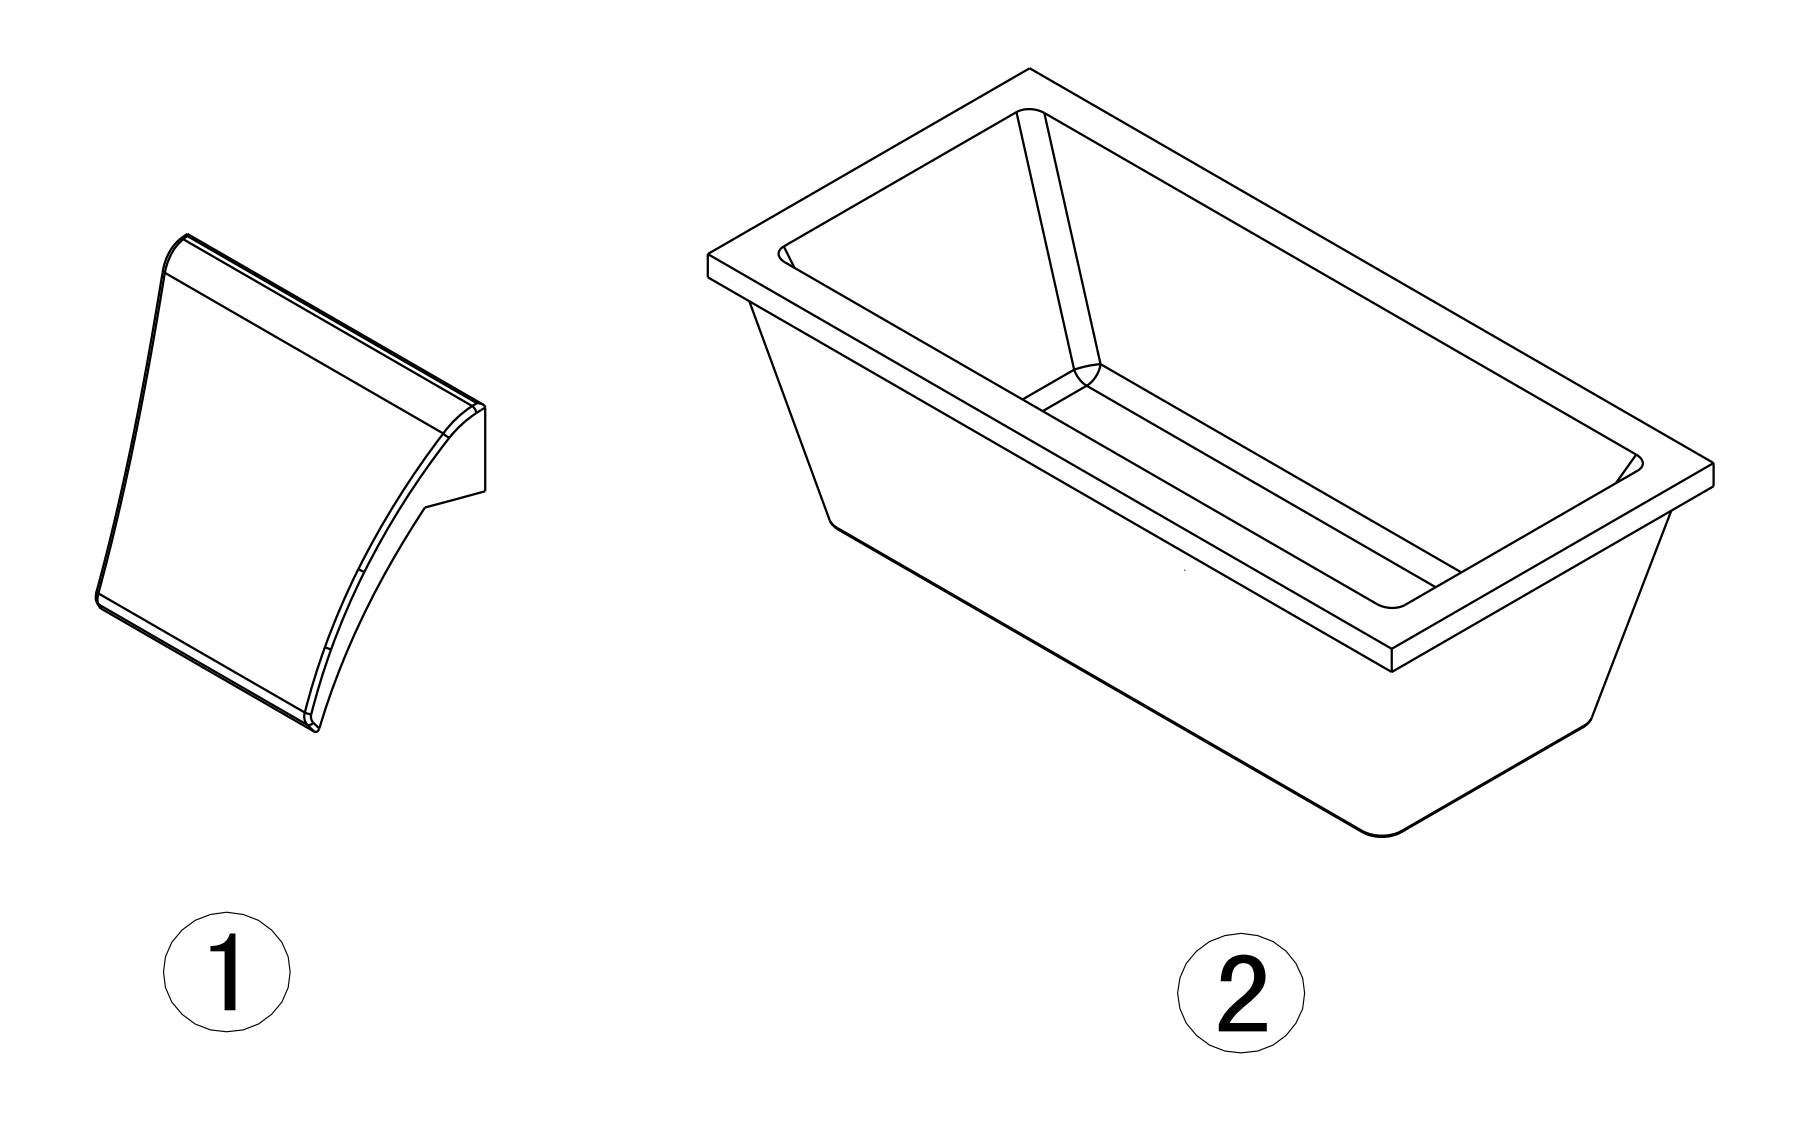


Part#	Description	Qty
1	pillow	1
2	bathtub	1


Required tools



Screwdriver



Pencil



Level



Adjustable Spanner wrench


Tape measure



Bucket

1. Leveling

Decide exactly where you wish to install your bathtub and gently put it down where decided.
Important: The unit must be installed on a leveled floor.
The floor must support 50lb./sq. ft. (245 kg/m≤) (2.4 kPa).

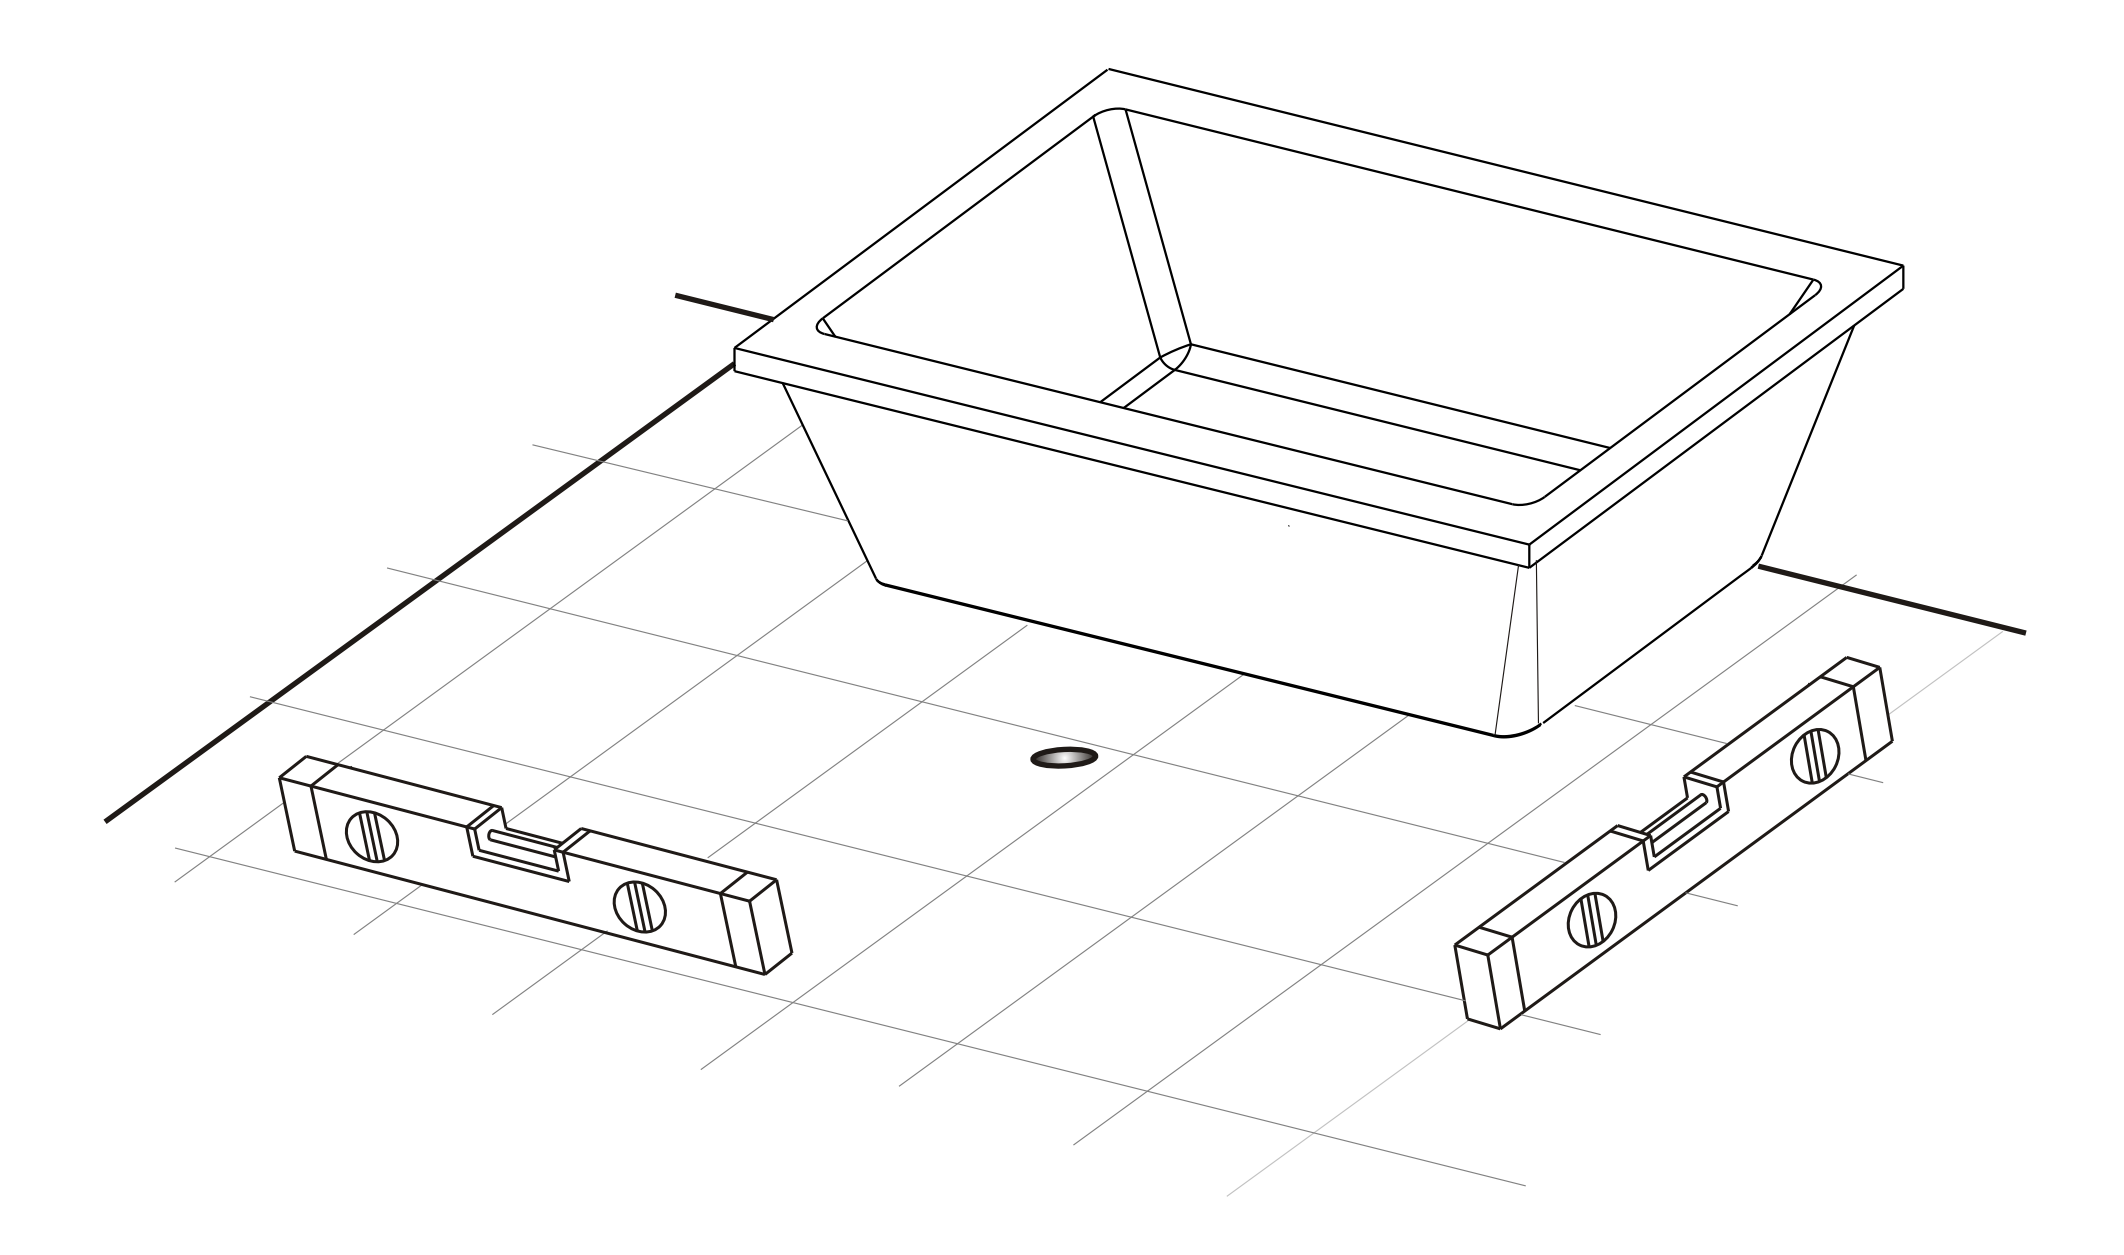


Outline the base of the bathtub on the floor with a pencil

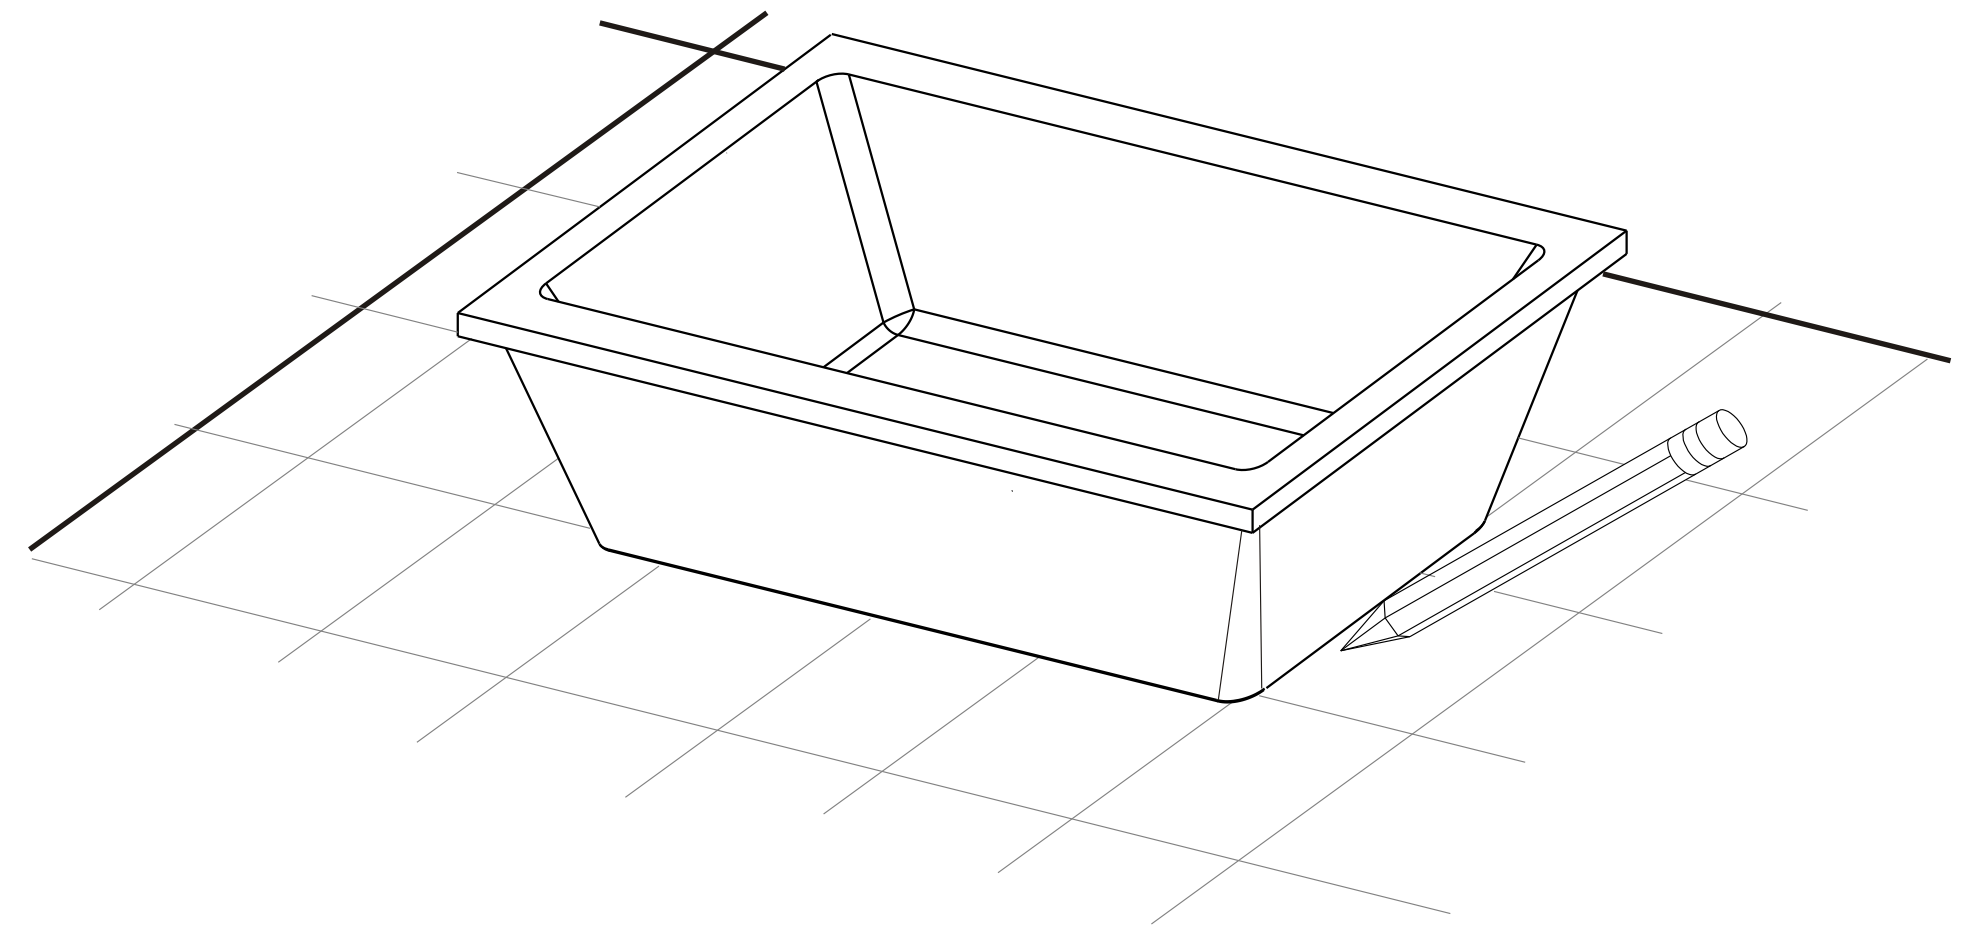


2. Plumbing

It is recommended to have a competent, professional plumber do the plumbing installations.
Gently move the bathtub and install the basic plumbing parts (not included) to connect the bathtub drain to the floor drain components :water inlet and floor drain.

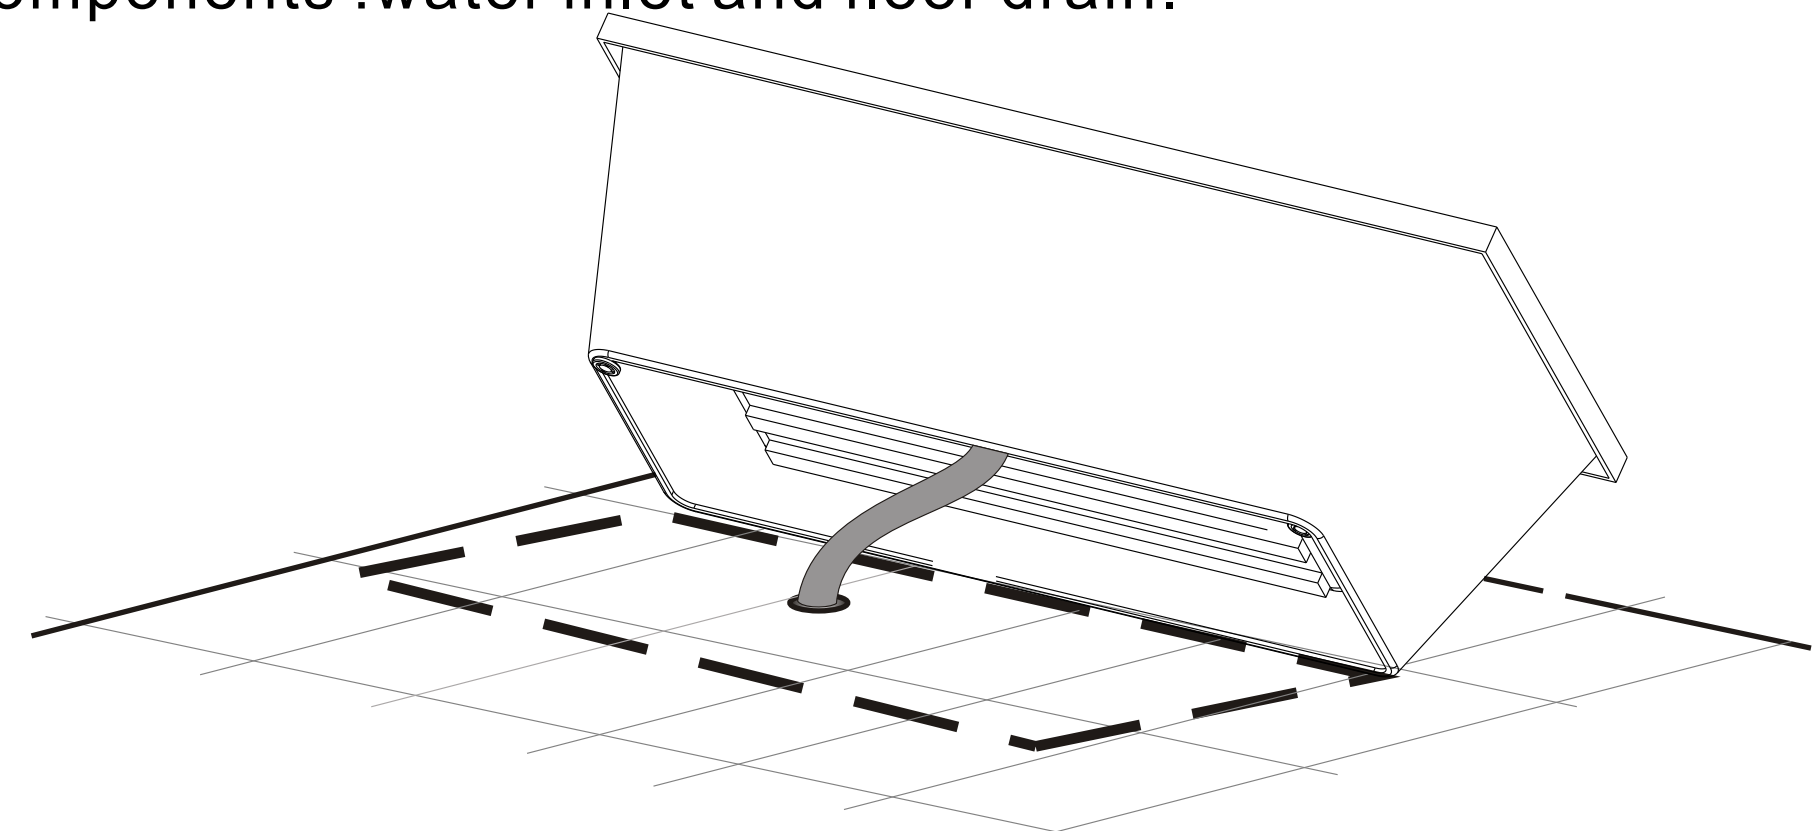

3. Mandatory Test

The bathtub must be tested before installation is complete. Pour some water into the bathtub to test drainage and check for leaks. If necessary, adjust by legs by tightening with a spanner wrench. If a leak is found, adjust bathtub to level.

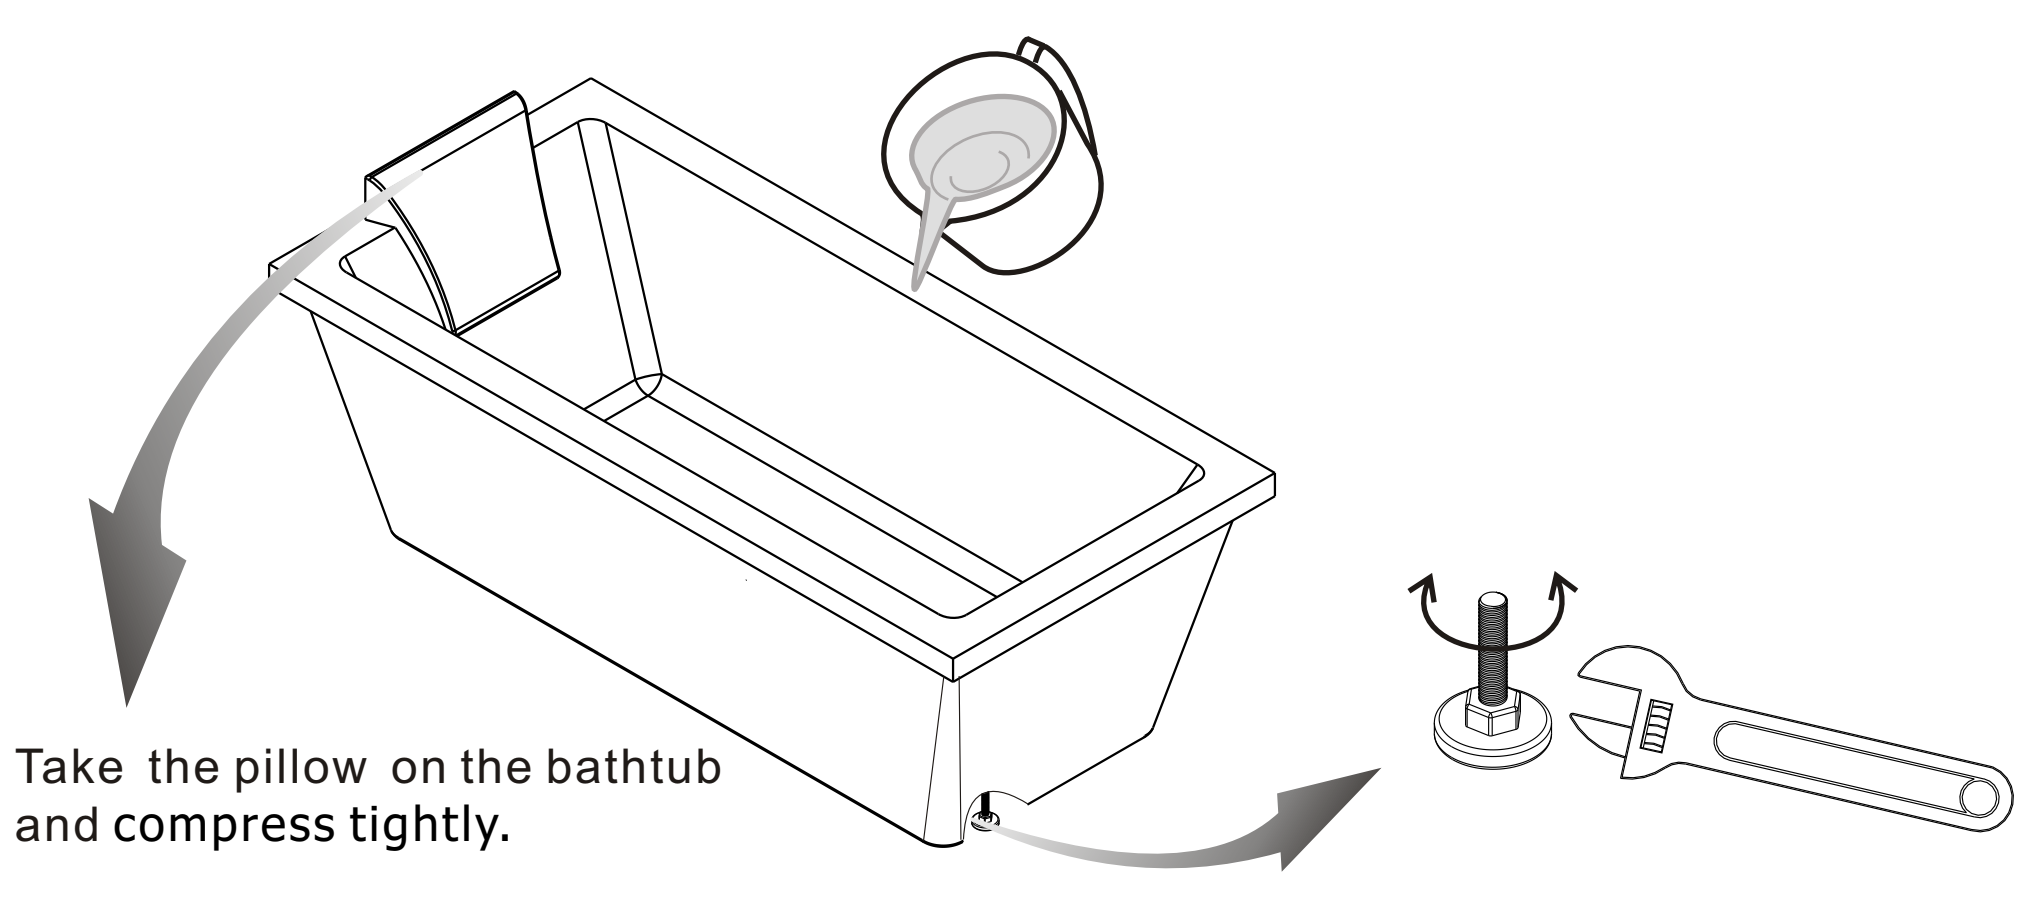

Adjust the feet screws and make sure the water flows into the drain.

WARRANTY

Thank you for purchasing this Dolphin Plumbing bathtub.
This product has been made to demanding, high-quality standards and are guaranteed against manufacturing faults for a period of 5 year from the date of purchase.
This warranty does not affect your statutory rights.
For service within the warranty period, please contact the store where the product was purchased. Product model number and proof of purchase are required for any service request.
The product is guaranteed if used for normal trade purposes and remains valid for the original purchaser only.
Any guarantee will be deemed invalid if the product has been misused or neglected. Dolphin Plumbing cannot be held responsible for any labour costs , injuries or damage incurred during product installation, repair or replacement, including any consequential or indirect damages.
Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.


Avant de commencer


Utilisez seulement des éléments (égouttoir, trop-plein, valves, pièces d'installation) ne nécessitant aucune soudure durant l'assemblage.
Lisez attentivement ce manuel avant de commencer l'installation.
Consultez le code du bâtiment local afin de vous assurer que l'installation est conforme aux normes.
Afin de protéger la baignoire pendant son installation, nous vous conseillons de déposer un morceau de carton dans le fond.
Avant l'installation, examinez minutieusement la baignoire afin de déceler tout dommage apparent. Le cas échéant, veuillez communiquer avec le service à la clientèle.
Cette baignoire est faite de fibre de verre et d'acrylique.
Nous vous suggérons d'être deux personnes pour installer cette baignoire.


Entretien


Si la température de la pièce est trop basse, préchauffez la baignoire avec de l'eau chaude (18- 20° C). Veillez à ce que de l'eau très chaude (plus de 50° C) n'atteigne pas la baignoire directement. Après utilisation, videz complètement la baignoire, puis essuyez-la avec un linge doux. Assurez-vous qu'il ne reste plus d'eau dans le bain.
Une désinfection régulière procure une défense efficace contre les bactéries susceptibles de se développer avec les sédiments qui s'accumulent avec le temps dans les baignoires et les douches.
Pour l'entretien quotidien, utilisez un linge humide et un savon doux liquide.
Pour les surfaces en acrylique, l'utilisation occasionnelle d'un nettoyant pour surfaces en acrylique procurera du lustre et protégera le fini.
N'utilisez pas de nettoyants abrasifs, de grattoirs, de brosses de métal, ou tout autre article ou produit risquant de rayer ou d'atténuer l'éclat du bain.
Taches de peinture : Utilisez soit de la térébenthine, soit du diluant à peinture.
Composé à joint : Utilisez une spatule de bois ou de plastique recouverte d'un linge humide. N'utilisez pas de lame ou de brosse de métal.
Si vous utilisez un tapis de bain en caoutchouc, vous devez le retirer immédiatement après chaque utilisation. Le fait d'ignorer cette recommandation pourrait causer des dommages qui ne seraient pas couverts par la garantie.


Pièces

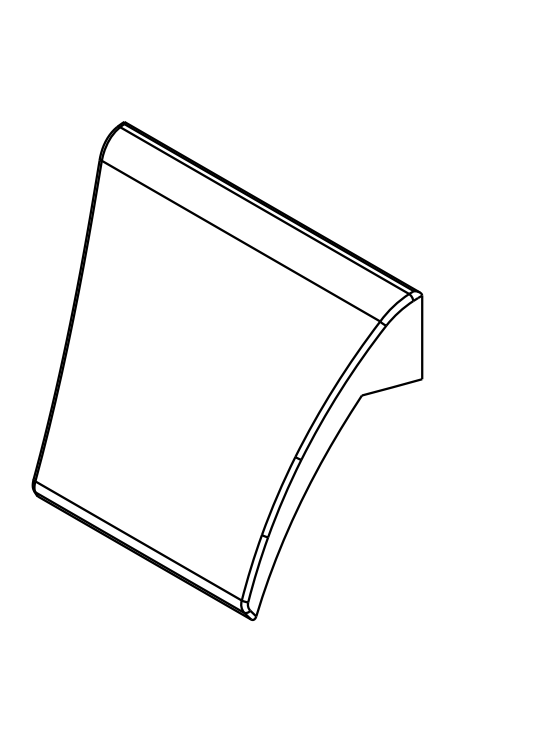

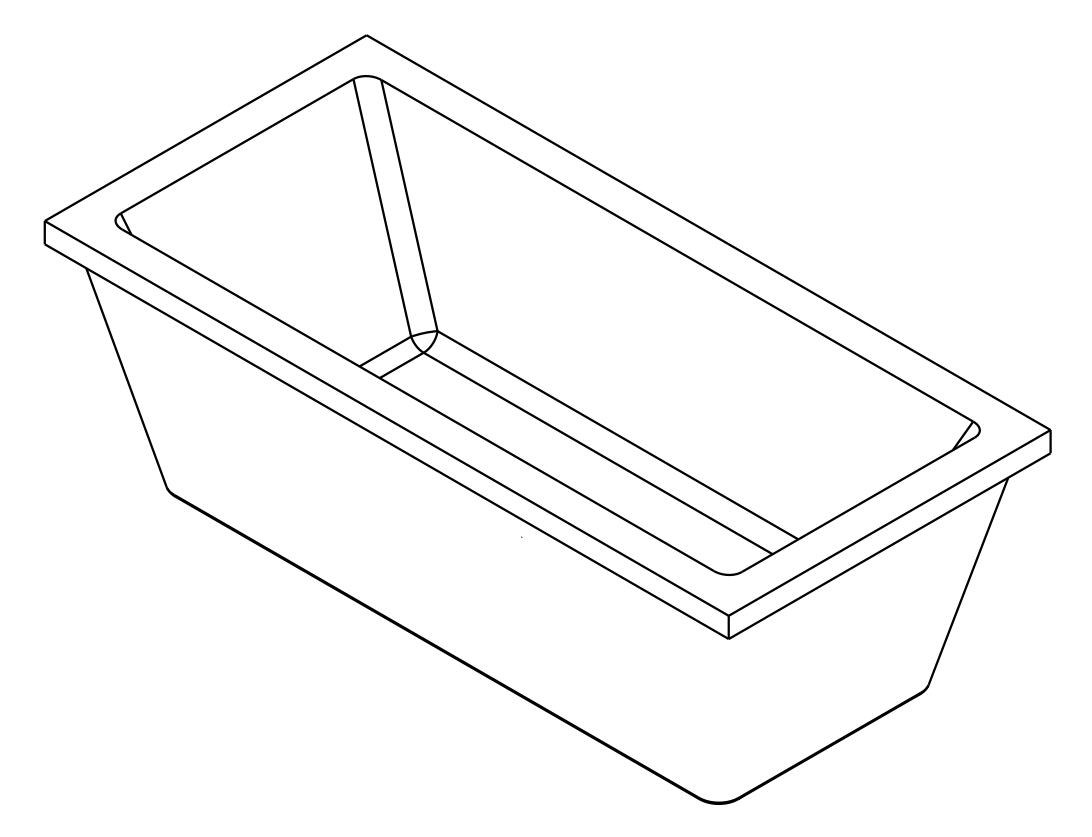

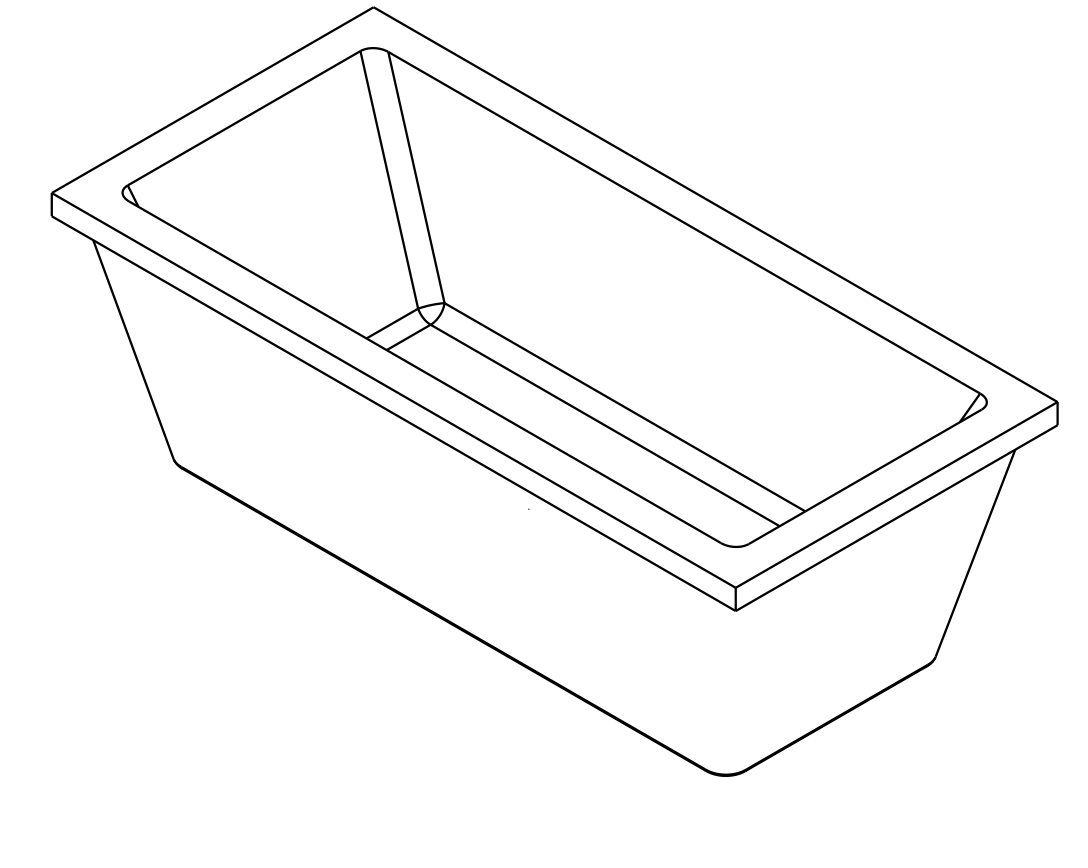




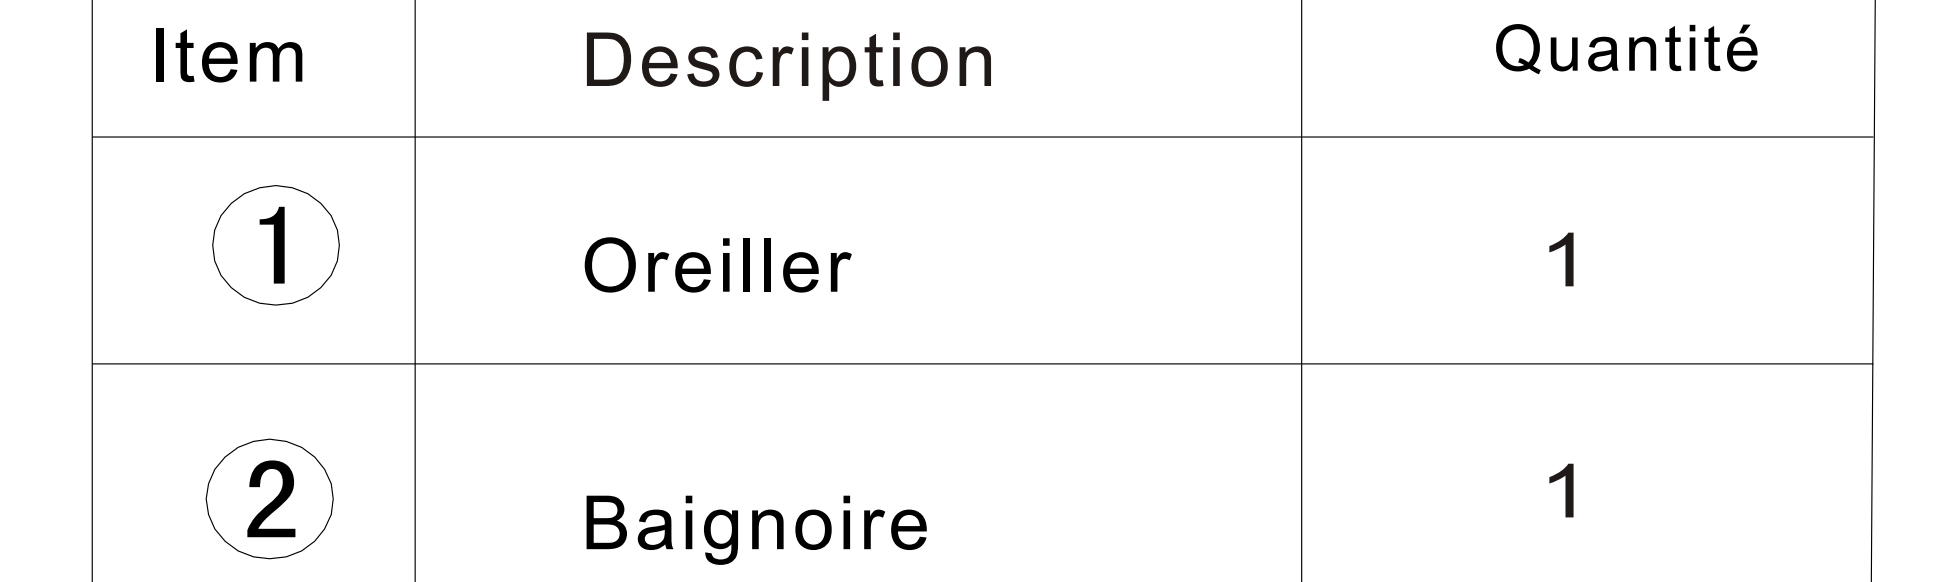


Item	Description	Quantité
1	Oreiller	1
2	Baignoire	1


Outils nécessaires









Crayon








Clé ajustable




Ruban à mesurer




Seau d'eau

1. Mise à niveau

Déposez avec précaution la baignoire à l'emplacement exact où vous souhaitez l'installer.
Important : la baignoire doit être installée sur un plancher nivelé et pouvant supporter 50 lb/pi² (245 kg/m²) - 2,4 kPA.

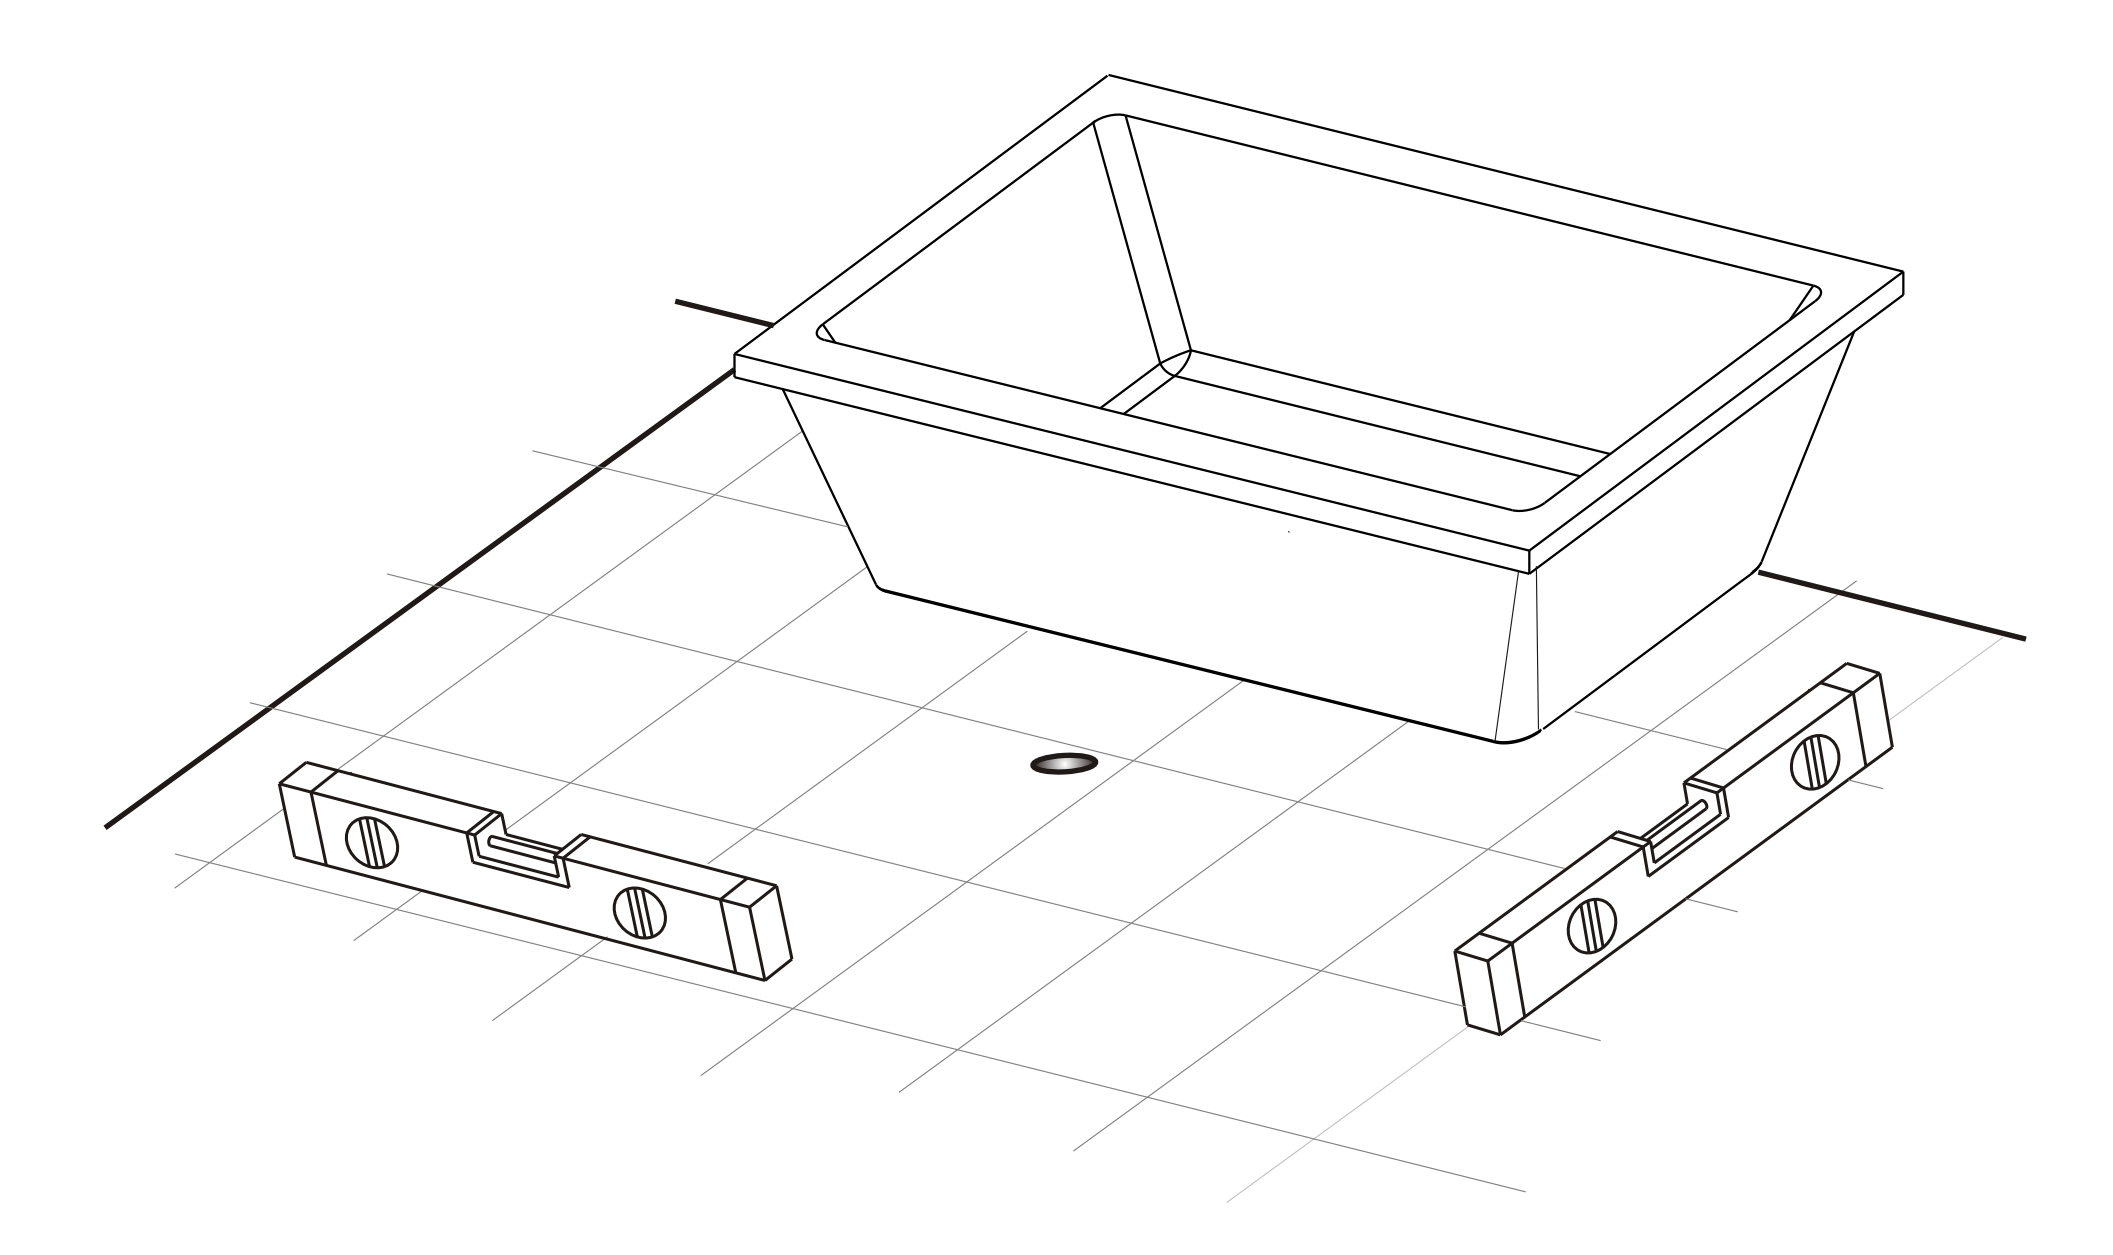


Tracer le contour du bain sur le plancher avec un crayon

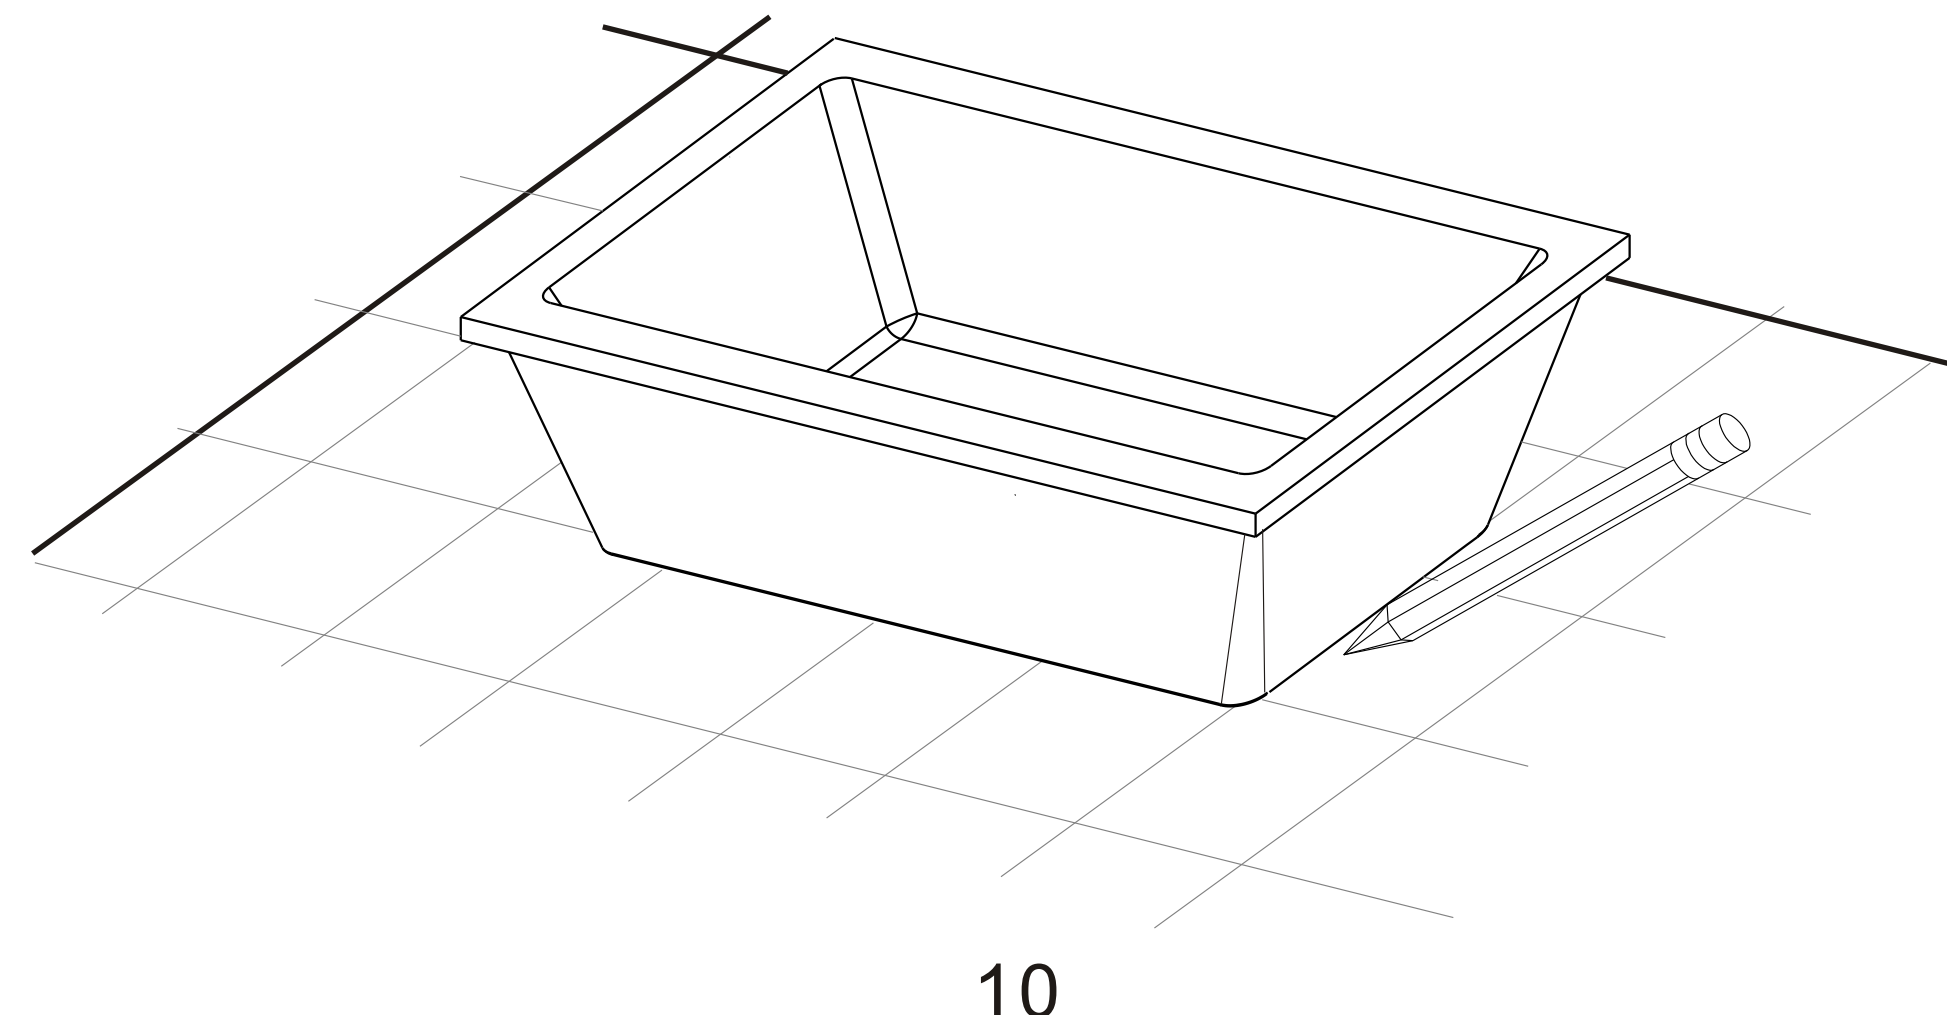


2. Plomberie

Il est recommandé d'utiliser les services d'un plombier professionnel et compétent pour effectuer les travaux de plomberie.
Déplacez la baignoire et installez les éléments de base de la plomberie : l'entrée d'eau et le drain de plancher (vendus séparément). Reliez le drain du bain à celui du plancher.Veuillez suivre les instructions du manufacturier.

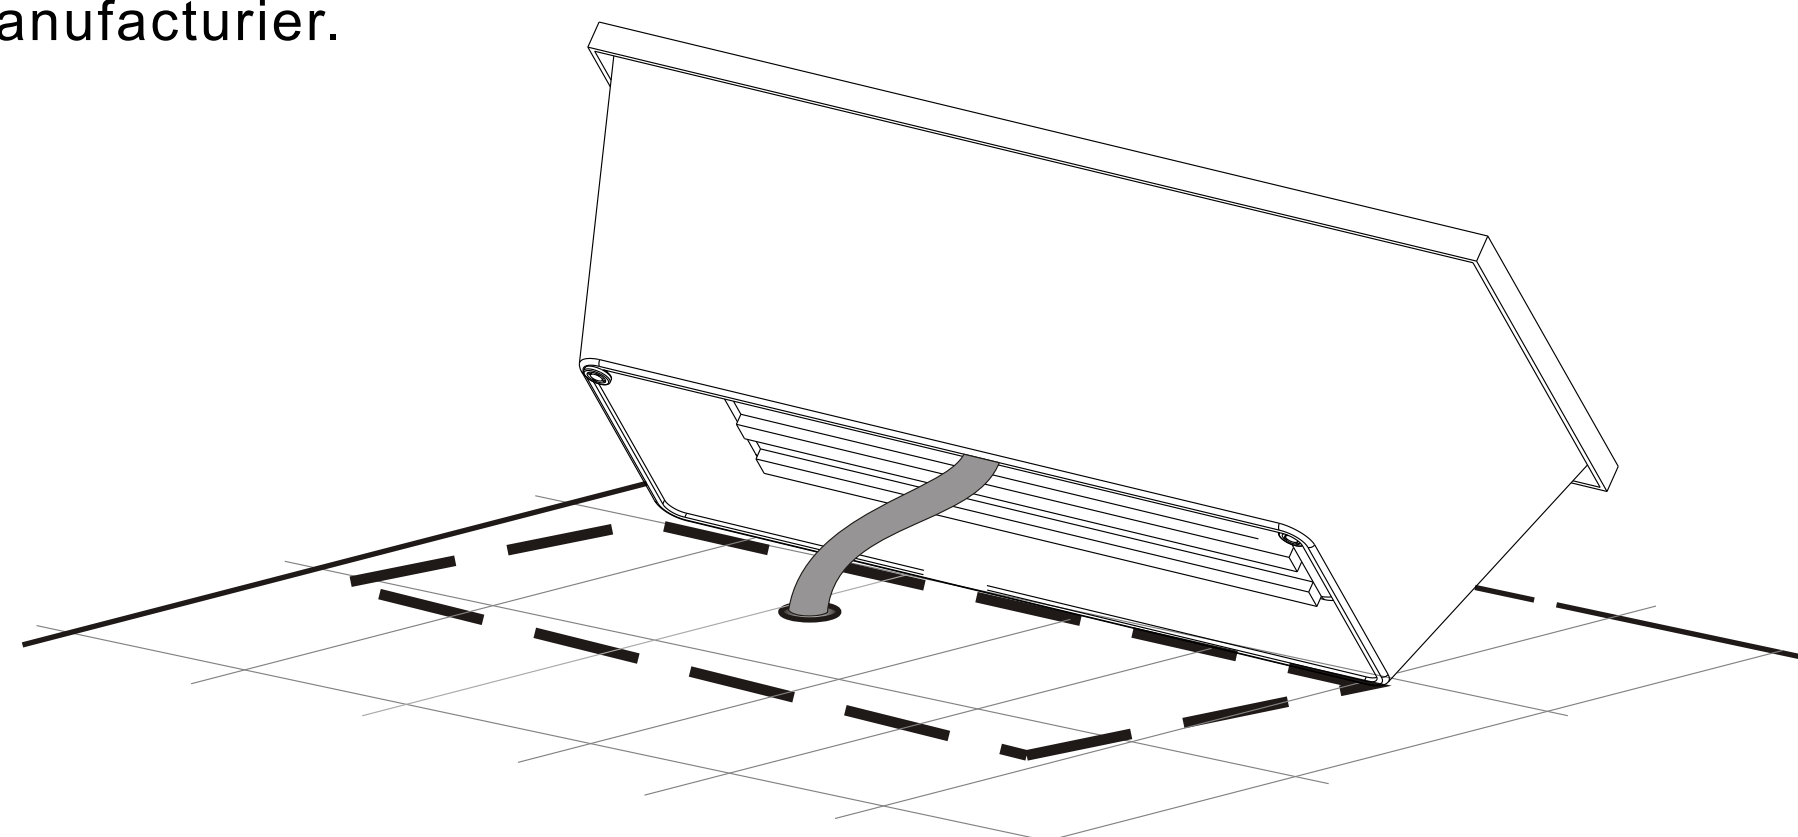

3. Test obligatoire

Vous devez tester la baignoire avant de compléter l'installation. Versez un peu d'eau dans le bain afin de vérifier que l'écoulement se fait correctement et qu'il n'y a pas de fuite. Si nécessaire, modifiez la hauteur des pieds ajustables à l'aide d'une clé.

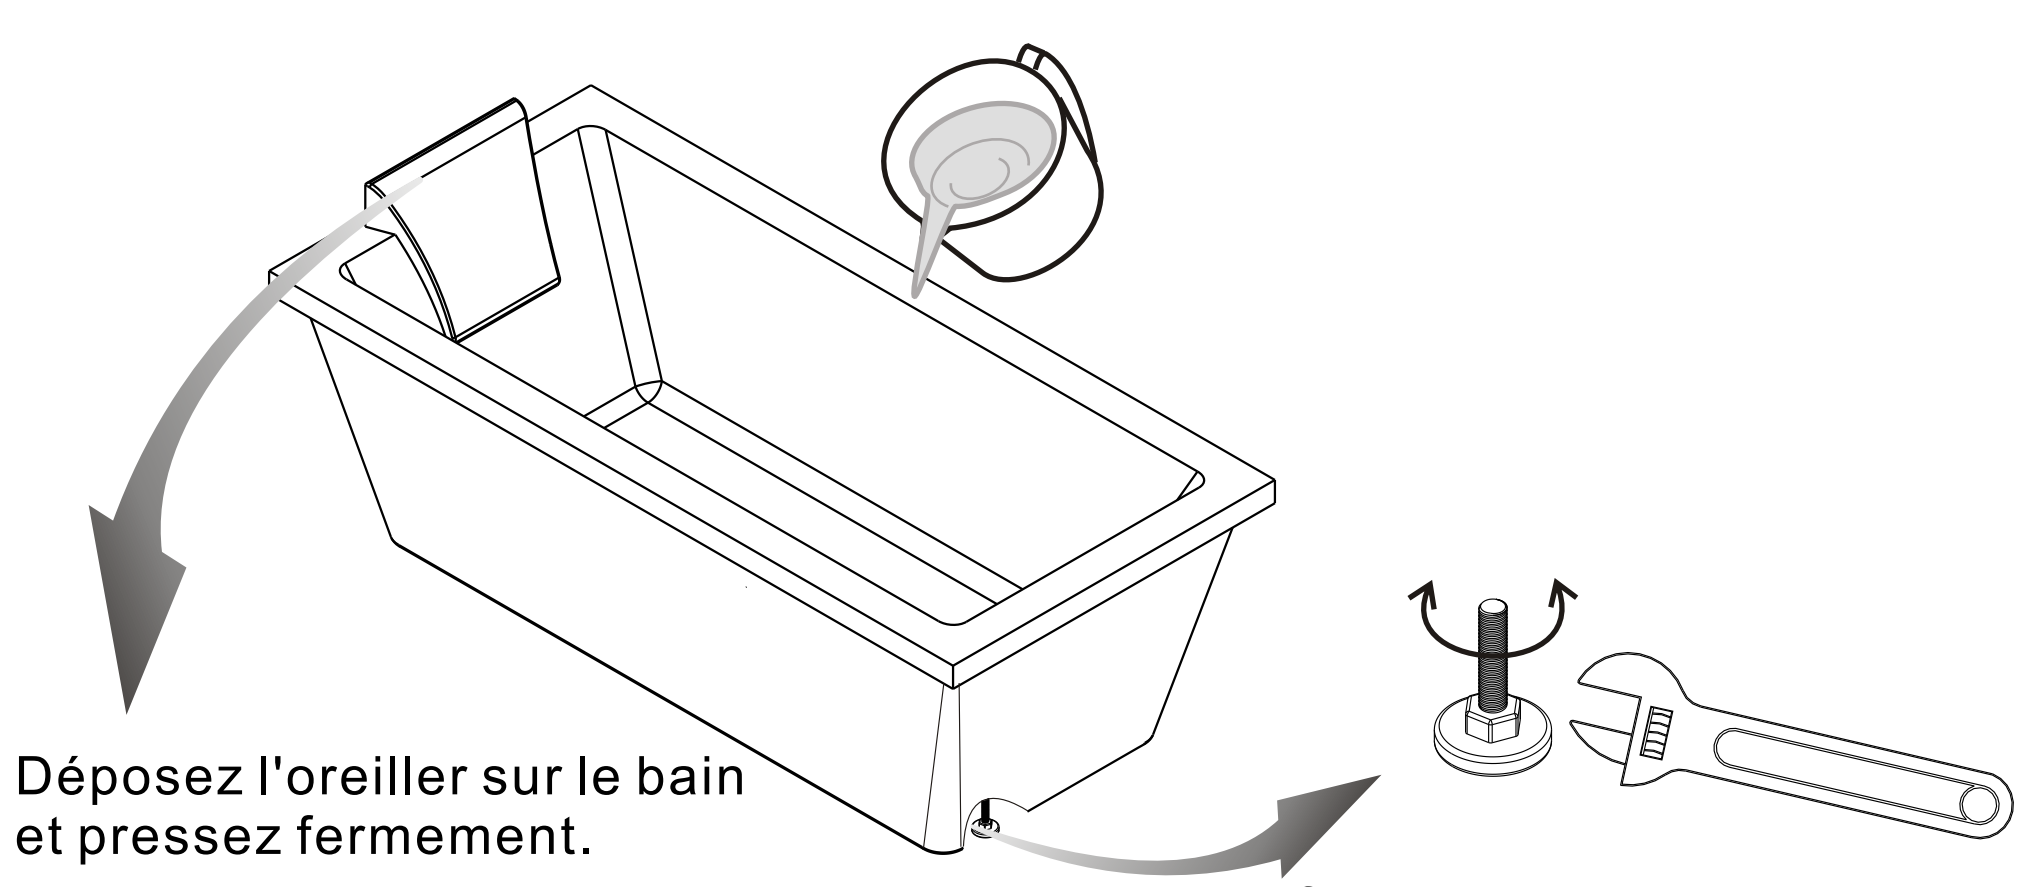

Garantie

Nous vous remercions d'avoir acheté un bain Dolphin Plumbing. Ce produit répond à des normes de haute qualité et est garanti contre tout défaut de fabrication pour une période de 5 ans à partir de la date d'achat.
Cette garantie n'affecte pas vos droits légaux.
Pour obtenir du service durant la période de garantie, veuillez communiquer avec le détaillant où vous avez acheté le produit. Le numéro de modèle du produit et une preuve d'achat sont nécessaires pour toute demande de service.
Ce produit est garanti si vendu par le biais d'un commerce à un consommateur pour son usage personnel et n'est valide que pour l'acheteur original. La garantie sera jugée invalide si le produit est mal entretenu ou mal utilisé.
Dolphin Plumbing ne peut être tenu responsable pour les frais de main d'oeuvre, les blessures ou dommages pouvant être occasionnés au moment de l'installation, de la réparation ou du remplacement du produit, incluant les dommages indirects et immatériels.
Compte tenu de l'amélioration continue des produits, nous nous réservons le droit d'en modifier les spécifications sans préavis.